

# DT04-08PA-L012 ✓ ACTIVE

DEUTSCH | DEUTSCH DT


TE Internal #: DT04-08PA-L012

Housing for Female Terminals, Wire-to-Wire, 8 Position, 9.09 mm [.358 in] Centerline, Sealable, Gray, Wire & Cable, Power, Panel Mount, DEUTSCH DT

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors

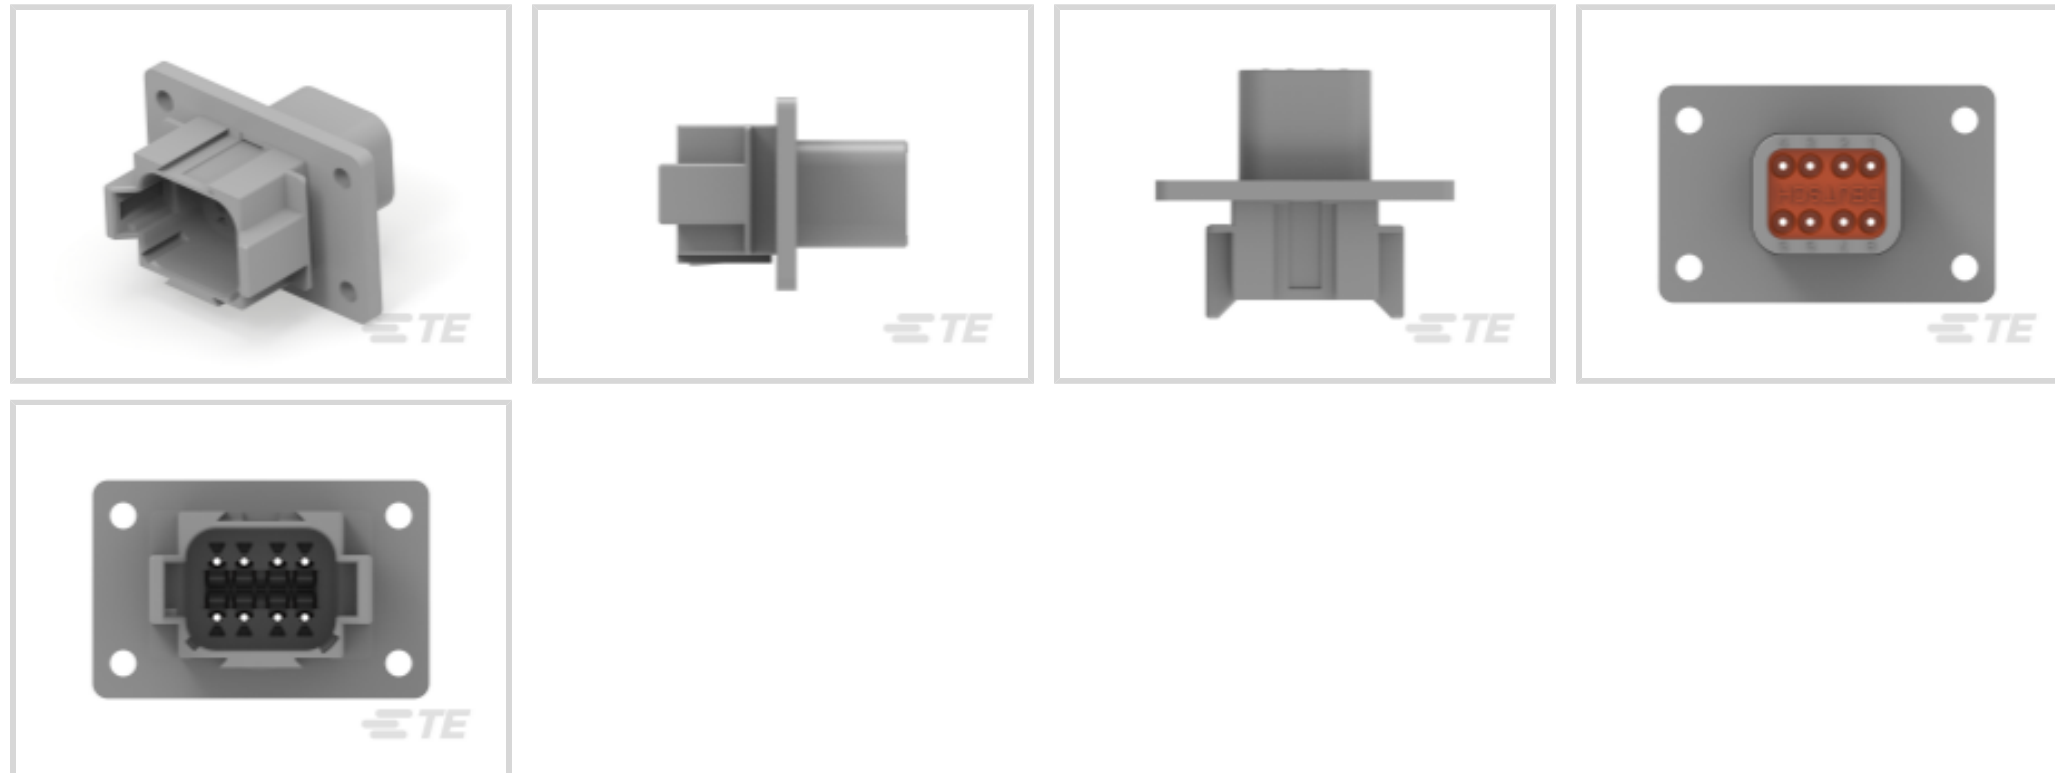

Connector System: **Wire-to-Wire**

Number of Positions: **8**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **9.09 mm [.358 in]**

Sealable: **Yes**

[All DEUTSCH DT Receptacle Connectors \(231\)](#)

## Features

### Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

### Configuration Features

Blank Cavity Position	0
Connector Modification	Welded Flange
Number of Positions	8
Number of Rows	2



### Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	250 V

### Body Features

Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	A

### Contact Features

Contact Size	Size 16
Contact Type	Receptacle
Mating Pin Diameter	1.57 mm[.062 in]
Contact Current Rating (Max)	13 A

### Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Panel Mount

### Housing Features

Housing Material	PA GF
Centerline (Pitch)	9.09 mm[.358 in]

### Dimensions

Connector Height	35.51 mm[1.398 in]
Product Width	54.99 mm[2.165 in]
Product Length	45.67 mm[1.798 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Compatible Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]

### Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

### Operation/Application

Circuit Application	Power
---------------------	-------



### Industry Standards

Degree of Protection	IP68, IP6K9K
Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	12mm Flame Test per Standard UL-94

### Packaging Features

Packaging Quantity	200
Packaging Method	Box

### Other

Serviceable	Yes
Connector Position Assurance Capable	No

### Product Compliance



[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability



#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts

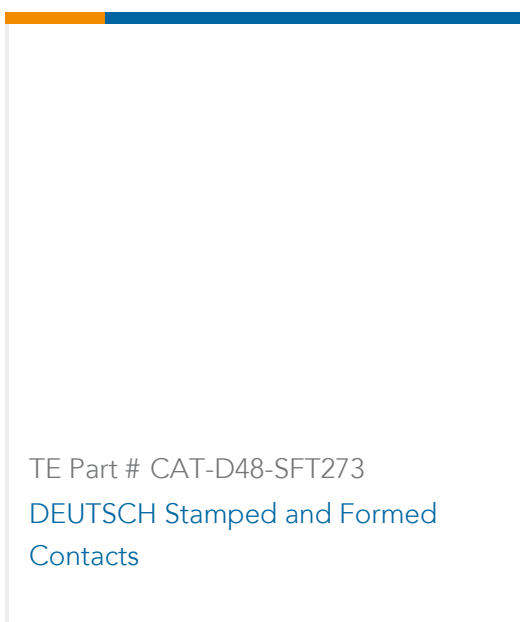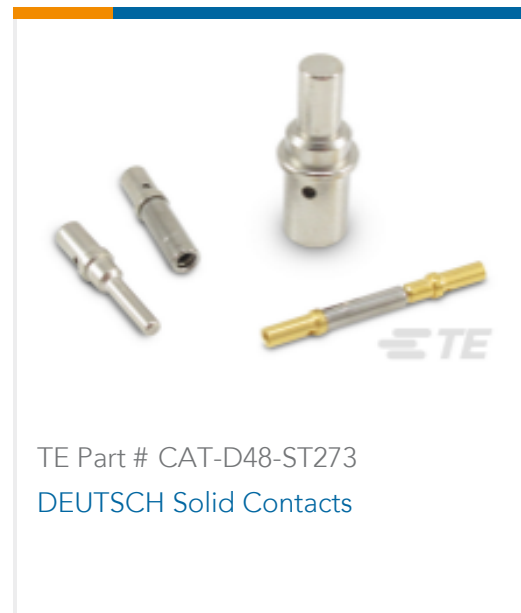

Also in the Series | **DEUTSCH DT**

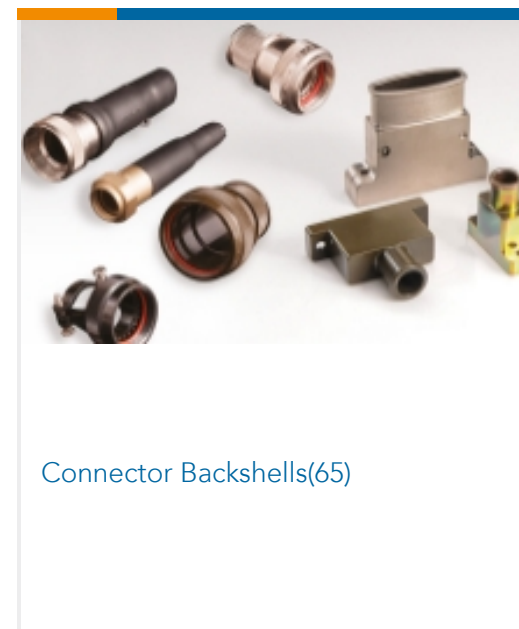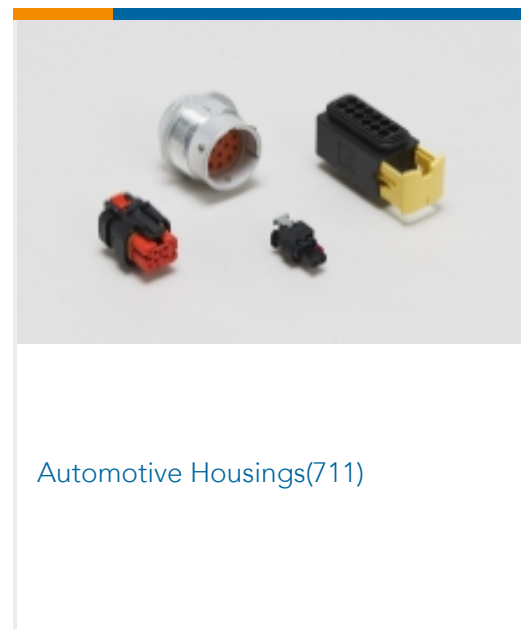


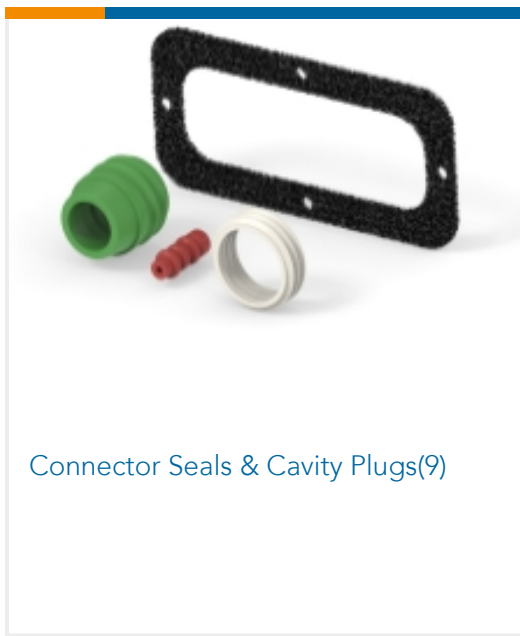


Connector Seals & Cavity Plugs(9)



Connector Strain Relief(28)

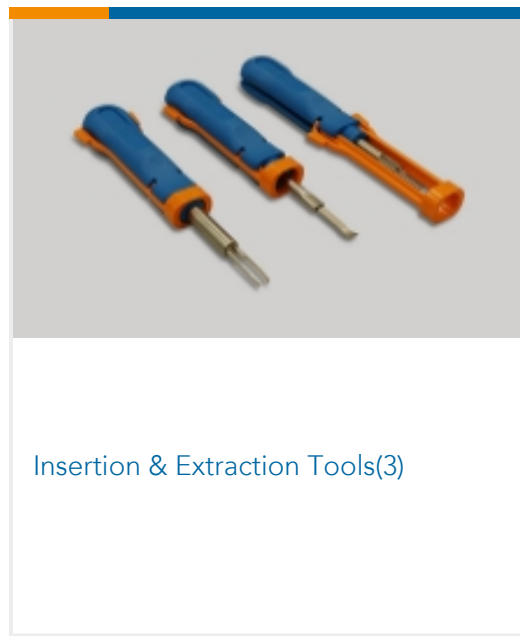

Insertion & Extraction Tools(3)

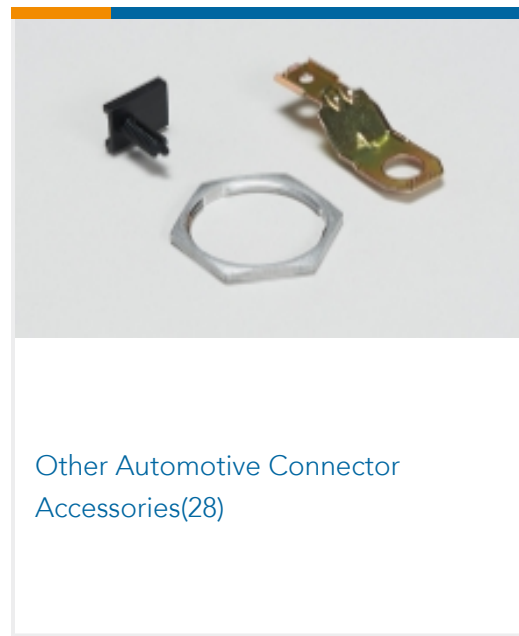

Other Automotive Connector Accessories(28)



PCB Headers & Receptacles(106)

## Customers Also Bought



TE Part #DT04-08PB-L012  
DEUTSCH DT Receptacle Connectors



TE Part #DT06-08SA  
PLG, 8P, GRY, N, A



TE Part #W8S  
WEDGE LOCK, 8P, PLG, ORG, STD, DT



TE Part #DTP4P-L012-GKT  
GASKET, 4P, BLK, DTP DT



TE Part #3-1971773-4  
PTL 1X4 PLUG HSG STD TEMP KEY C BLU




TE Part #DT4P-L012-GKT  
GASKET, 4P, BLK, DT/DTM



TE Part #DT12-L012-GKT  
GASKET DT 12 WY FLD RC



TE Part #DT8P-L012-GKT  
GASKET, 8P, BLK, DT/DTM

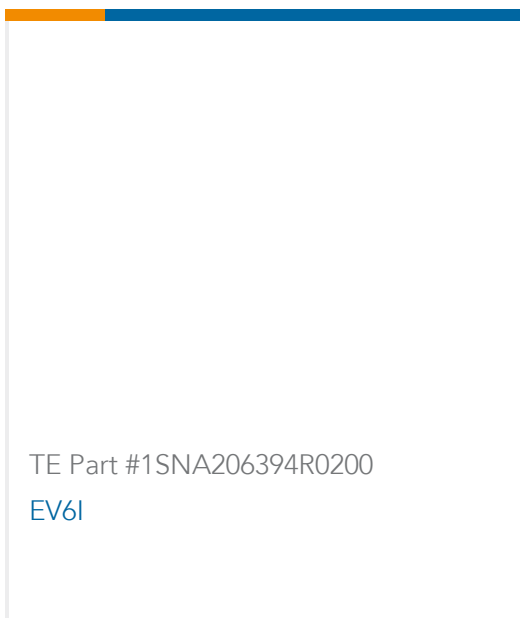

TE Part #1SNA206394R0200  
EV6I

## Documents



### Product Drawings

[REC, 8P, GRY, N, FLANGE, A](#)

English

---

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_DT04-08PA-L012\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_DT04-08PA-L012\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_DT04-08PA-L012\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[TERMINALS AND CONNECTORS](#)

English

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

---

### Product Specifications

[Application Specification](#)

English

---

### Agency Approvals

[UL Report](#)

English