KISSLING | KISSLING Series 30

TE Internal #: K1003384

General Purpose Power Relay, Bistable, 2 Coils, Polarized, .055 W Coil, 2.1 – 2.6 ohm Coil Resistance, KISSLING Series 30, Power

Relays

View on TE.com >



Relays & Contactors > Relays > Power Relays > Power Relay, 200A, Standard, Bistable, 2 Coils, Polarized





Relay Type: General Purpose Power Relay

Coil Magnetic System: Bistable, 2 Coils, Polarized

Coil Power Rating DC: .055 W Coil Resistance: $2.1 - 2.6 \Omega$

Coil Special Features: Coil Suppression Diode

All Power Relay, 200A, Standard, Bistable, 2 Coils, Polarized (8)

Features

Product Type Features

Relay Type	General Purpose Power Relay
Configuration Features	
Coil Special Features	Coil Suppression Diode
Contact Arrangement	1 Form X SPST-NO-DM
Contact Number of Poles	1
Electrical Characteristics	
Coil Power Rating DC	.055 W
Coil Resistance	$2.1 - 2.6 \Omega$
Coil Voltage Rating	9 VDC, 16 VDC
Contact Current Rating	200 A
Contact Voltage Rating	12 VDC
Contact Features	
Contact Material	Ag Alloy
Termination Features	

Terminals

Relay Connection Type



$T \cdot I \cap C \cdot I \cdot$	\sim \pm \cdot \cdot
Lorminal (ontiquiration	Scrow Lorminale
Terminal Configuration	Screw Terminals
1 orrinar oornigaration	

Mechanical Attachment

Product Mounting Feature Type	Flange with Mounting Holes
Product Mount Type	Panel

Dimensions

Product Width	60 mm[2.36 in]
Product Length	78 mm[3.07 in]
Product Height	90 mm[3.54 in]

Operation/Application

Coil Magnetic System	Bistable, 2 Coils, Polarized

Packaging Features

Packaging Method	Carton	
------------------	--------	--

Other

Contact Current Class 200 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Yet Reviewed
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Not reviewed for China RoHS compliance
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the



product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts



TE Part # CAT-AL6-KSPR29200 Power Relay, 200A, Standard, Monostable, DC



Also in the Series | KISSLING Series 30

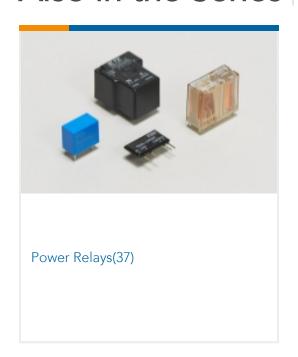

Customers Also Bought



Documents

Product Drawings

Relay 30-213-11

English

Relay 30-213-11

German

CAD Files

3D PDF

3D



Customer View Model

ENG_CVM_CVM_30-213-11_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_30-213-11_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_30-213-11_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

KISSLING SINGLE POLE BI-STABLE RELAYS Series 30 / 200A

English